





About Overlaps and Strip Types

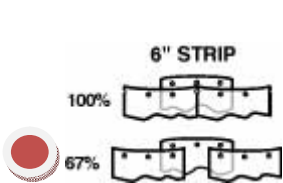


Most Doors under 7' exhibit **6"** strips and a standard 67% overlap.

8" strips are common with a 50% overlap (common for doors to 9 & 10' h)

12" & **16"** wide strips are common with 67% and 75% overlaps and are usually recommended for larger openings with forklift and machine traffic.

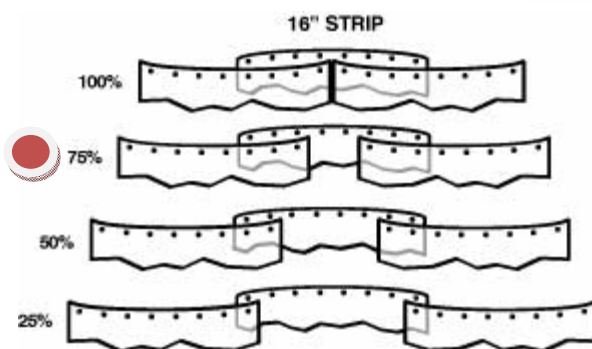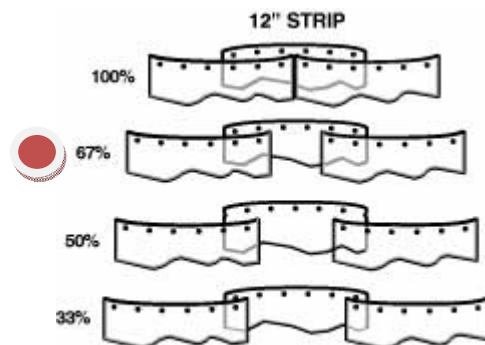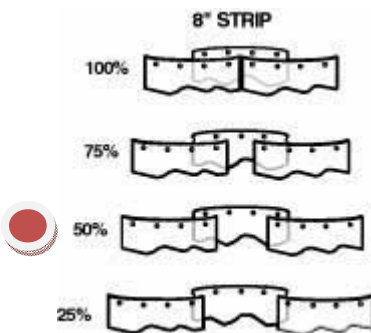

 Most Common Overlaps
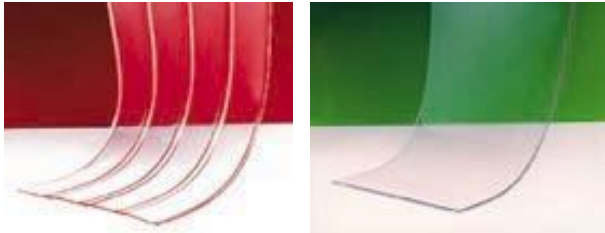
<p><i>Low Temp vs Standard</i></p>	<p><i>Standard kits are recommended for temperature ranges from 10 deg F to 150 F deg whereas Low Temp* Kits are recommended from freezers or temperatures ranging from -20 deg F to 120 deg F</i></p>
<p><i>Ribbed vs Smooth</i></p> 	<p><i>Ribbed Strips exhibit triangular ribs .25" wide and .10" high, with rounded edges. Both surfaces of the strip have ribs spaced 2" apart and are off-set by 1/2". Ribbed strips are ideal for heavy traffic strip doors because they significantly reduce scratches so the door remains clearer and safer.</i></p> <p><i>Ribbed strips also prevent strips from sticking in environments where there is condensation, moisture or slime.</i></p>