


AIR BARRIER HEATED-AIRDR-TS-48 With Automatic Activation and T-Stat



- Notes:
- 1) Mounting Hardware is not supplied.
 - 2) Installer is responsible for ensuring a sound installation.
 - 3) Neutral line required.
 - 4) Electrical connections and disconnect by others.
 - 5) 1 Wall mount bracket provided.
 - 6) Remote mounted Wall T-Stat provided.
 - 7) Sensor mounting bracket and reflector provided.
 - 8) Unit is equipped with a factory set 1 min off delay on the heat coil and an additional 1 min off delay on the fan. Off delays are field adjustable.

Color: Aluminum with Black

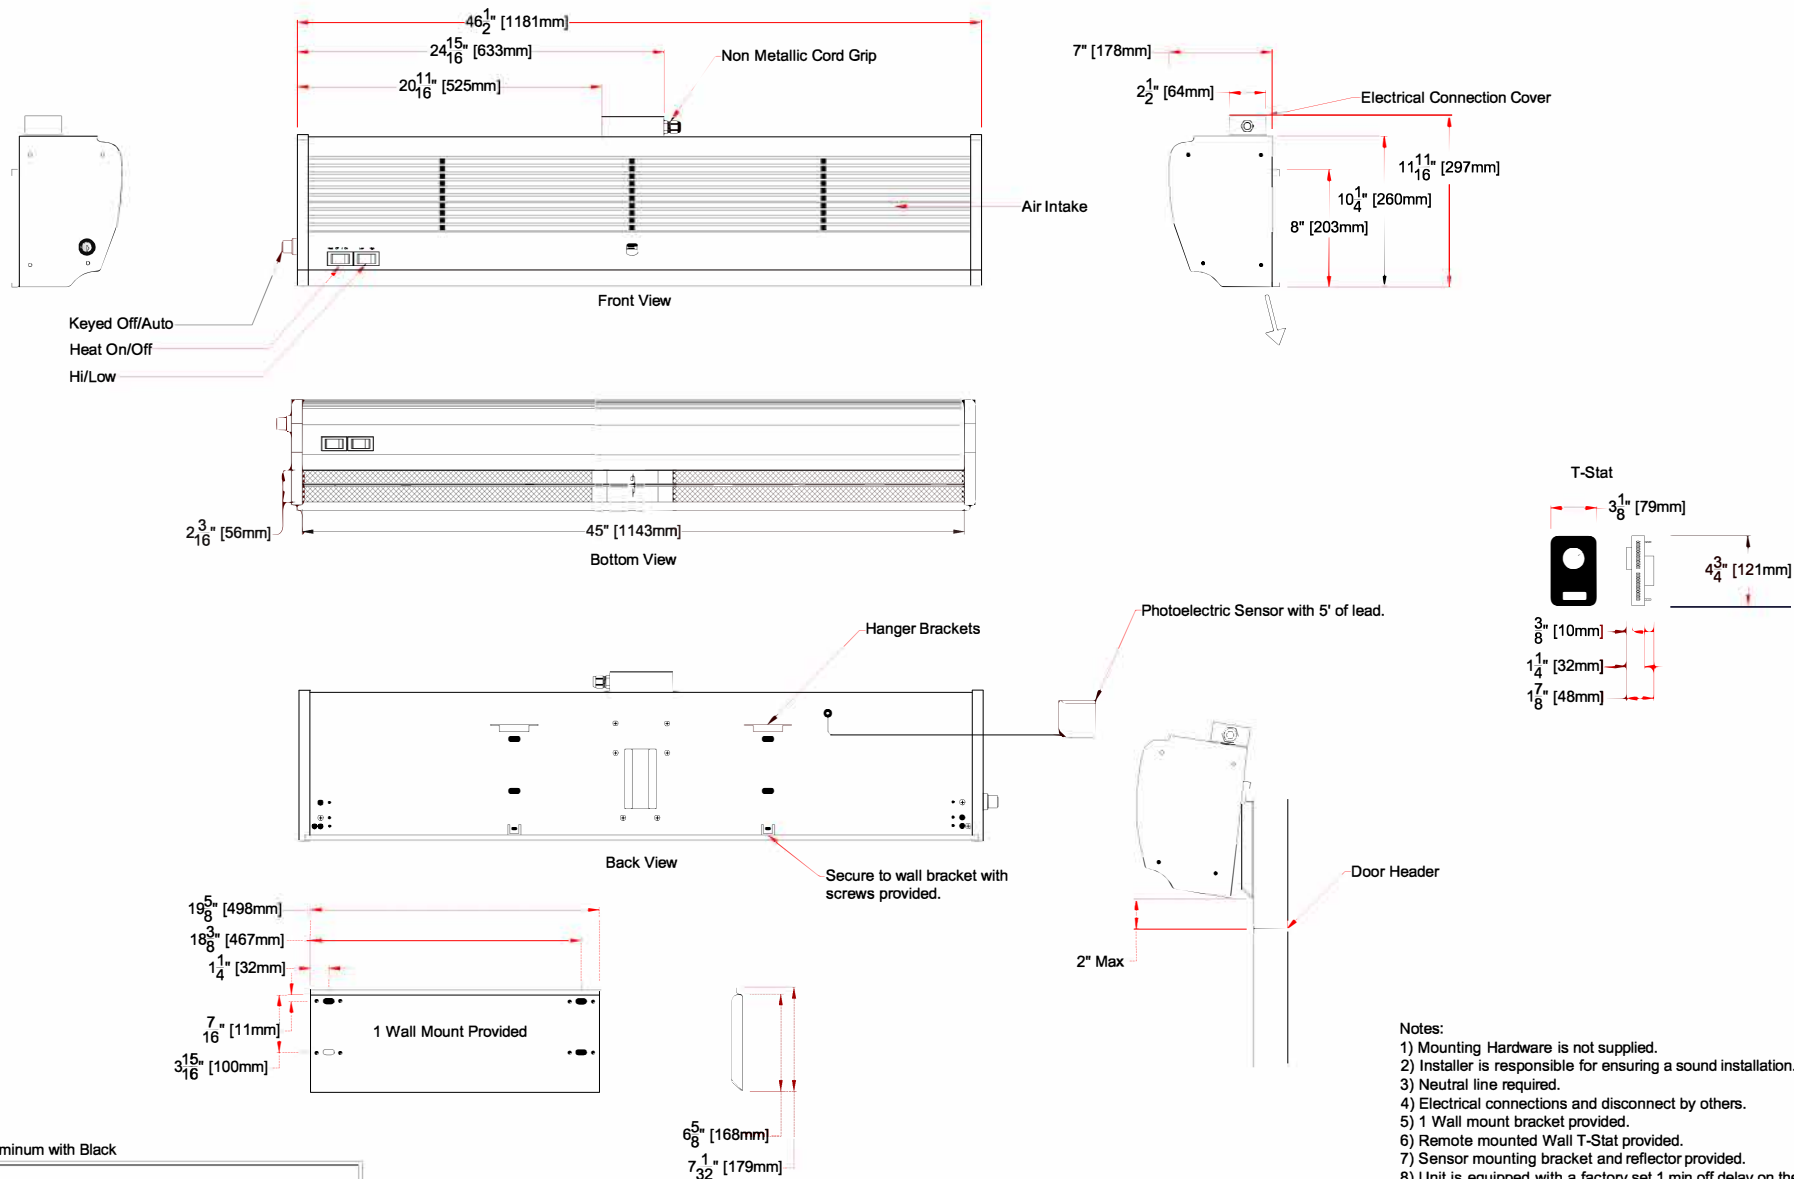

	HEATER		CFM			FPM		dB		MOTOR	WEIGHT
MODEL	Kw	VOLTAGE	HIGH	LOW	FLA	HIGH	LOW	HIGH	LOW		
TS-48AA	8	220/3/60 4W	940	850	21.8	1870	1670	57	55	1 @ 60W	17 Kg